# HELP AND ADVICE

For any gueries or concerns, please feel free to contact us or visit our website

> www.allied-paint.com info@allied-paint.com

(+44) 1614787745

**GLOSS** WOOD & METAL



#### **TECHNICAL INFORMATION**

Colour Standard colour range.

High Gloss. Volume Solid 47 % ± 2. **Dry Film Thickness** 25 µm.

Drying Time 6 - 8 hours.

12 - 14 hours. **Recoating Time** 

Thinner / Cleaner De-aromatised white spirit.

34 °C 93 °F Flash Point Packing Size 1 & 2.5 litres.

## SURFACE PREPARATION

All loose material including loose plaster, cement splashes, old paint, dust, etc. must be thoroughly removed. New plaster/ concrete must be fully cured.

#### APPLICATION

Roller, brush or airless spray.

#### CONDITIONS DURING APPLICATION

The temperature of the substrate should not be less than 5°C Good ventilation is necessary when the paint is used in confined spaces.

#### SAFETY, HEALTH AND ENVIRONMENT

- · Read label before use.
- Flammable liquid and vapors.
- Keep out of children's reach.
- · Contains Ketoxime which may cause an allergic reaction.
- · Safety data sheet is available on request.
- · Repeated exposure may cause skin dryness and cracking
- If medical advice is needed have product container or label at hand.
- Avoid contact with eyes and skin.
- In case of contact with skin, immediately wash with soap
- · In case of contact with eyes, promptly remove contact lenses and flush with water for atleast 15 minutes. Get attention immediately.
- Dispose of content and container in accordance with all local, national and international regulations.

**GLOSS WOOD & METAL** 



### PRODUCT DESCRIPTION

Superior synthetic solvent based Gloss Finish for wood and metal which are highly rust resistant with 100% washablility.

## PRODUCT FEATURES

- One coat finish.
- · Tough and durable.
- · For interior and exterior use.
- · Rust resistant.
- No undercoat required.
- · Easy to clean
- · For use on wood and metal.

## COVERAGE

Following factors will affect the coverage.

- · Quality of prepared surface.
- · Nature of surface (absorbent / non-absorbent)
- · Film thickness applied
- Uniformity of application
- Method of application (roller, spray or brush)
- · Weather conditions at site.
- · Applicators skill.

1 Litre = 15 m<sup>2</sup> 2.5 Litre = 40 m<sup>2</sup>

## **MOVE & STORE**

Keep container upright and secure at all times, in a safe and dry place especially during transit. Reseal container, do not store below 5°C or above 40°C.



This guide will help you to choose the perfect product for all paint jobs throughout your home.



• Silk Sheen Finish Excellent Coverage • For High Traffic Areas

Extra Smooth Finish

- Tough & Durable

No Undercoat Required



Excellent Weather

- - · Rain Proof in One Hour · Dirt & Crack Resistance



· Harmless to Pets & Plants

· Rain Proof in One Hour Natural Slip Resistance · Long Lasting Colours



· MOULDGUARD · Stain Repellent Technology • Tough & Durable




- Tough & Durable



No Undercoat Required



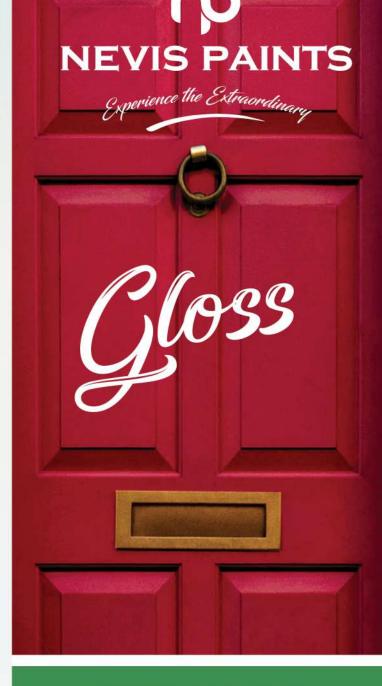

**WOOD & METAL** ONE COAT FINISH



Stalybridge SK15 1SY +(44) 1614787745





Navis Paints Gloss is a high-performing choice of homeowners looking for an exceptional glossy finish for wood and metal. It is tough and durable, while delivering true colours with 100% washablility.



For a contemporary gloss finish on wood and metal surfaces evoking nature's essence, choose hues that elevate your living spaces; ranging from gentle forest greens to deep timber browns and an array of colors that mirror the Sun's passage through the sky. Embrace the serene beauty of nature's palette by blending cool verdant tones, earthy greens, and warm oak-inspired browns, resulting in a harmoniously glossy finish that brings the outdoors into your home.

TO UNIQUE STULE

Salsa Red
1014

Lemon
1006

