# HELP AND ADVICE

For any queries or concerns, please feel free to contact us or visit our website

> www.gobispaints.co.uk info@allied-paint.com



## **ULTRA SMOOTH** MASONRY COAT **EXTERIOR FINISH**



## **ULTRA SMOOTH MASONRY COAT EXTERIOR FINISH**



#### MOVE & STORE

Keep container upright and secure at all times, in a safe and dry place especially during transit. Reseal container, do not store below 5°C or above 40°C.

### **TECHNICAL INFORMATION**

Colour Wide range of colours.

Eggshell Volume Solid 38 % ± 2. **Dry Film Thickness** 25 µm. 1 - 2 hours. Drying Time **Recoating Time** 2 - 3 hours. Thinner / Cleaner Clean water.

Flash Point None (water based). 1 & 2.5, 4 litres. **Packing Size** 

#### SURFACE PREPARATION

All loose material including loose plaster, cement splashes, old paint, dust, etc. must be thoroughly removed. New plaster/ concrete must be fully cured.

#### APPLICATION

Roller, brush or airless spray.

#### CONDITIONS DURING APPLICATION

The temperature of the substrate should not be less than 5°C and relative humidity should not be more than 70% measured in the vicinity of the substrate. Good ventilation is necessary when the paint is used in confined spaces.

#### SAFETY, HEALTH AND ENVIRONMENT

- Read label before use.
- Keep out of children's reach.
- Safety data sheet is available on request
- Repeated exposure may cause skin dryness and cracking.
- · If medical advice is needed have product container or label at hand.
- In case of contact with eyes, promptly remove contact lenses and flush with water for atleast 15 minutes. Get medical attention immediately.
- Dispose of content and container in accordance with all local, national and international regulations.

### PRODUCT DESCRIPTION

Lomond Masonry is an ultra-durable exterior emulsion paint that gives your home acidic rainproof technology, suitable for dry to humid climatic conditions and protect the walls from hairline cracks, dirt and dust. It has strong anti-Algal/ fungi compounds and unique cross-linking feature of binder with special organic-inorganic non-fading pigments with anti-carbonation

#### COMPOSITION

Based on ultra-fine particle size ter-polymer acrylic elastomeric binder with high quality non-fading pigments and silicon additives.

#### RECOMMENDED USE

Suitable for protection and decoration for all usual exterior masonry surfaces such as brick, concrete, rendering unpainted and repainted substrates.

### **PRODUCT FEATURES**

- · Rain Proof in one hour
- · Dirt and Crack Resistance
- Non Fading Colours
- · Excellent Weather Resistance
- Anti Carbonation

#### COVERAGE

Following factors will affect the coverage.

- · Quality of prepared surface.
- Nature of surface (absorbent / non-absorbent)
- Film thickness applied
- · Uniformity of application
- · Method of application (roller, spray or brush)
- · Weather conditions at site.
- · Applicators skill.

1 Litre = 15 m<sup>2</sup> 2.5 Litre = 40 m<sup>2</sup> 4 Litre = 60 m<sup>2</sup>

This guide will help you to choose the perfect product for all paint jobs throughout your home.









• Excellent Coverage •1 Hour Touch Dry • Tough & Durable No Undercoat Required

· Excellent Weather

· Rain Proof in One Hour · Dirt & Crack Resistance



· Harmless to Pets & Plants

· Rain Proof in One Hour Natural Slip Resistance Long Lasting Colours




· MOULDGUARD · Stain Repellent Technolog • Tough & Durable



· One Coat Finish Tough & Durable



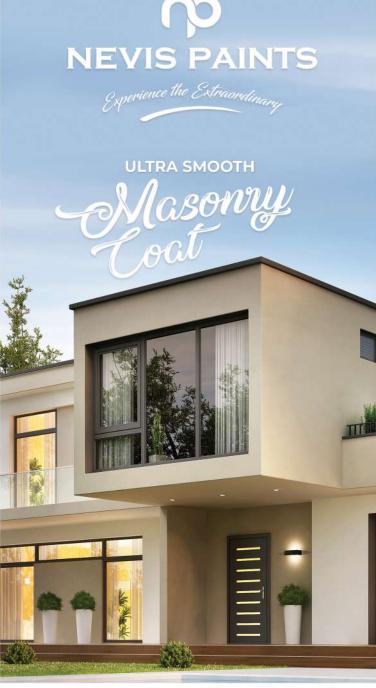

**ELITE SERIES EXTERIOR FINISH** 



Specialized exterior paints that can withstand rain, dry frost, extreme winds and heat. These UV and rain resistant paints provide home exteriors with the optimum protection which can withstand all seasons.

