

HELP AND ADVICE

For any queries or concerns, please feel free to contact us or visit our website

> www.allied-paint.com info@allied-paint.com

(+44) 1614787745



MATT EMULSION **INTERNAL WALLS & CEILINGS**



MATT EMULSION **INTERNAL WALLS & CEILINGS**



MOVE & STORE

Keep container upright and secure at all times, in a safe and dry place especially during transit. Reseal container, do not store below 5°C or above 40°C.

SURFACE PREPARATION

All loose material including loose plaster, cement splashes, old paint, dust, etc. must be thoroughly removed. New plaster/ concrete must be fully cured.

APPLICATION

Roller, brush or airless spray.

CONDITIONS DURING APPLICATION

The temperature of the substrate should not be less than 5°C and relative humidity should not be more than 70% measured in the vicinity of the substrate. Good ventilation is necessary when the paint is used in confined spaces.

SAFETY, HEALTH AND ENVIRONMENT

- Read label before use.
- Keep out of children's reach.
- · Safety data sheet is available on request
- · Repeated exposure may cause skin dryness and cracking.
- · If medical advice is needed have product container or label at hand.
- In case of contact with eyes, promptly remove contact lenses and flush with water for atleast 15 minutes. Get medical attention immediately.
- Dispose of content and container in accordance with all local, national and international regulations.

PRODUCT DESCRIPTION

Water based acrylic emulsion which gives a smooth and matt finish that combines the luxury of class, exceptional coverage and durability.

PRODUCT FEATURES

- · One hour touch dry.
- · Excellent coverage.
- · Eco-friendly.
- · Extra smooth finish.

COVERAGE

Following factors will affect the coverage.

- · Quality of prepared surface.
- · Nature of surface (absorbent / non-absorbent)
- · Film thickness applied.
- · Uniformity of application.
- Method of application (roller, spray or brush).
- · Weather conditions at site.
- · Applicators skill.

1 Litre=12 m²

2.5 Litre = 30 m²

4 Litre = 48 m²

10.56 Litre = 130 m²

TECHNICAL INFORMATION

Colour Standard colour range.

Finish Matt Finish Volume Solid 34 % ± 2. 30 µm. **Dry Film Thickness**

1 - 2 hours. Drying Time **Recoating Time** 2 - 3 hours. Thinner / Cleaner Clean water.

Flash Point None (water based). Packing Size 1, 2.5, 4 & 10.56 litres.

Product



This guide will help you to choose the perfect product for all paint jobs throughout your home.



- Silk Sheen Finish • Excellent Coverage •1 Hour Touch Dry • For High Traffic Areas

• Tough & Durable

No Undercoat Required

- · Rain Proof in One Hour · Rain Proof in One Hour · Dirt & Crack Resistance Natural Slip Resistance Long Lasting Colours



· MOULDGUARD · Stain Repellent Technology • Tough & Durable




• Tough & Durable No Undercoat Required










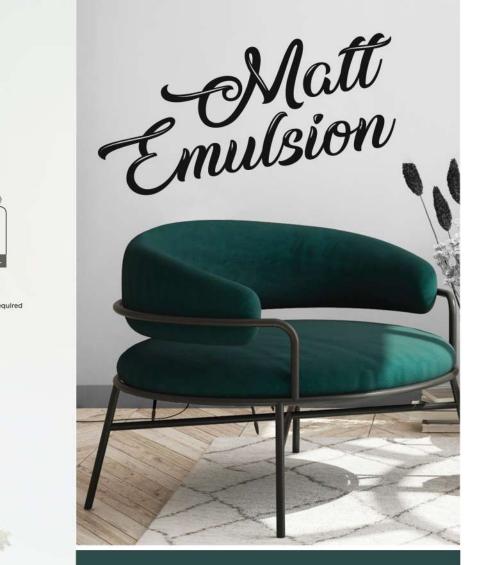

INTERNAL WALLS & CEILINGS EXCELLENT COVERAGE



ECO-FRIENDLY

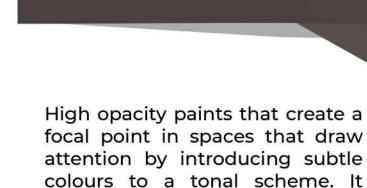


coverage and durability.

combines the luxury of a smooth, matt finish with exceptional

1 HOUR TOUCH DRY





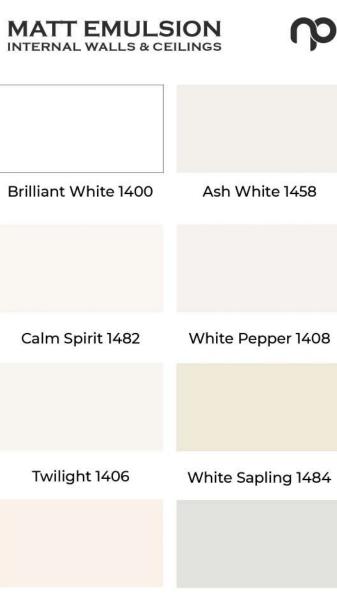

Baker White 1486

White Bucks 1485





Mid Night 1450



Cockleshell 1407




MATT EMULSION

INTERNAL WALLS & CEILINGS

Peach 1455

B

Sand Stone 1470

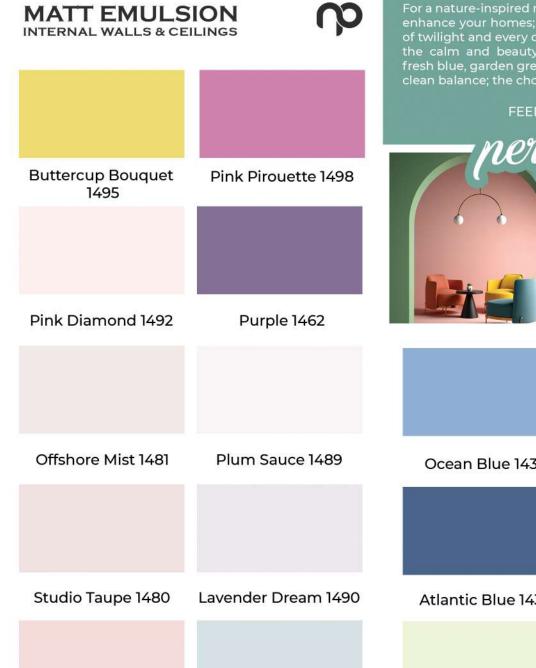


Kind Sky 1491

Roseville 1493

For a nature-inspired modernistic Interior, use shades that enhance your homes; from pale sky blues to inky indigos of twilight and every other colour under the Sun. Channe the calm and beauty of natures palette by combining fresh blue, garden greens and oak earth tones for a subtle clean balance; the choices are limitless.



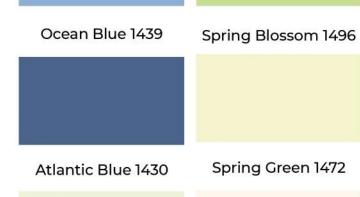

Smoke Ring 1483

Opalescence 1497