

SILK EMULSION **WALLS & CEILINGS**





TECHNICAL INFORMATION

Colour Wide range of colours.

Finish Silk Volume Solid 34 % ± 2. Dry Film Thickness 30 µm. **Drying Time** 1 - 2 hours. **Recoating Time** 2 - 3 hours. Thinner / Cleaner Clean water.

Flash Point None (water based). Packing Size 1 & 2.5, 4 litres.

SURFACE PREPARATION

All loose material including loose plaster, cement splashes, old paint, dust, etc. must be thoroughly removed. New plaster/ concrete must be fully cured.

APPLICATION

Roller, brush or airless spray.

CONDITIONS DURING APPLICATION

The temperature of the substrate should not be less than 5°C and relative humidity should not be more than 70% measured in the vicinity of the substrate. Good ventilation is necessary when the paint is used in confined spaces.

SAFETY, HEALTH AND ENVIRONMENT

- Read label before use.
- · Keep out of children's reach.
- Safety data sheet is available on request.
- Repeated exposure may cause skin dryness and cracking.
- · If medical advice is needed have product container or label at hand.
- In case of contact with eyes, promptly remove contact lenses and flush with water for atleast 15 minutes. Get medical attention immediately.
- Dispose of content and container in accordance with all local, national and international regulations.

PRODUCT DESCRIPTION

Nevis Silk Emulsion is a Water borne high opacity, low odor, durable quality interior acrylic silk emulsions with excellent washability, flexibility, scrub resistant and levelling properties. Nevis Silk Emulsion giving a delicate shine and good penetration to substrate.

COMPOSITION

9

High quality organic/inorganic pigments with blend of acrylic binder and distinctive additives.

PRODUCT FEATURES

- · 100% washable
- Silk sheen finish
- · Stain & oil resistant
- High durability
- · Anti-fungal and Anti-bacterial.

COVERAGE

Following factors will affect the coverage.

- · Quality of prepared surface.
- · Nature of surface (absorbent / non-absorbent)
- · Film thickness applied
- Uniformity of application
- · Method of application (roller, spray or brush)
- · Weather conditions at site.
- · Applicators skill.

1 Litre = 14 m² 2.5 Litre = 38 m²

4 Litre = 56 m²

MOVE & STORE

Keep container upright and secure at all times, in a safe and dry place especially during transit. Reseal container, do not store below 5°C or above 40°C.





This guide will help you to choose the perfect product for all paint jobs throughout your home.



· Silk Sheen Finish Excellent Coverage

• For High Traffic Areas

- Tough & Durable No Undercoat Required

· Rain Proof in One Hour

· Dirt & Crack Resistance

· Excellent Weather

- - · Rain Proof in One Hour Natural Slip Resistance

Long Lasting Colours

· Harmless to Pets & Plants




· MOULDGUARD · Stain Repellent Technology • Tough & Durable



• Tough & Durable





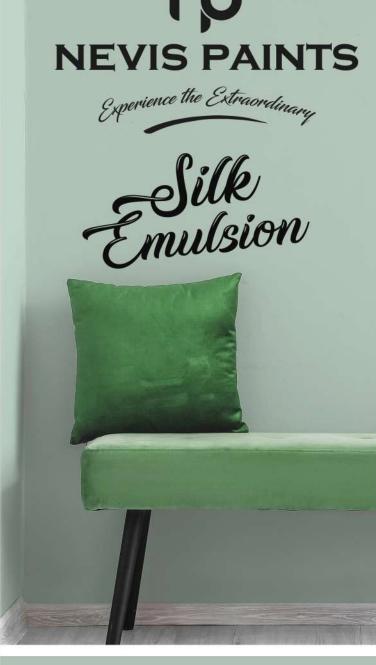

INTERNAL WALLS & CEILINGS EXCELLENT COVERAGE



High opacity paints that create a focal point in spaces that draw attention by introducing subtle colours to a tonal scheme.
Smooth finishes that can hide imperfections.

